



# Series 200 PUSH Cabinet Hinge 110°

C2APx99

Space needed to open the door



	T=	16	17	18	19	20	21	22	23	24	25	26
<b>K=3</b>	<b>A=</b>	0.5	0.7	0.9	1.2	1.5	1.8	2.4	3.7	5.1	6.5	7.8
<b>K=4</b>	<b>A=</b>	0.5	0.7	0.9	1.2	1.5	1.8	2.1	2.7	4.1	5.5	6.8
<b>K=5</b>	<b>A=</b>	0.5	0.7	0.9	1.2	1.5	1.8	2.1	2.6	3.1	4.1	5.4
<b>K=6</b>	<b>A=</b>	0.5	0.7	0.9	1.2	1.5	1.8	2.1	2.5	3.0	3.5	4.4



	T=	16	17	18	19	20	21	22	23	24	25	26
<b>K=3</b>	<b>L=</b>	0.0	0.0	0.0	0.0	0.2	0.5	0.8	1.1	1.4	1.7	1.9
<b>K=4</b>	<b>L=</b>	0.0	0.0	0.3	0.6	0.9	1.2	1.4	1.7	2.0	2.3	2.6
<b>K=5</b>	<b>L=</b>	1.1	1.3	1.6	1.8	2.1	2.3	2.6	2.9	3.1	3.4	3.6
<b>K=6</b>	<b>L=</b>	2.0	2.3	2.5	2.8	3.1	3.3	3.6	3.8	4.1	4.3	4.6

The above figures assume doors with square edges, a radiussed edge will reduce the L and A minimum values

**H:** Mount plate heights are calculated using one of the formulae below, based on whether the door is inset, quarter, half or full overlay.

**Inset:**  $H = -2 + K + A$


**Quarter:**  $H = 6 + K - (D)$

**Half:**  $H = 10 + K - (D)$

**Full:**  $H = 15 + K - (D)$

**K:** Drilling distance from door edge from 3mm to 6mm

**T:** Door Thickness 26mm maximum with square edges

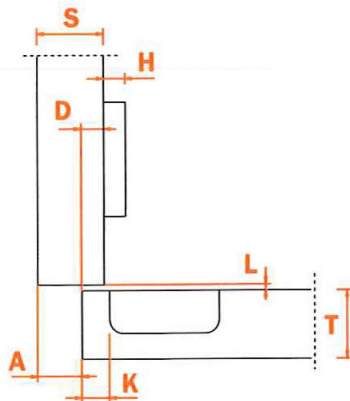

## Technical Information

11mm deep metal cup, 35mm cup diameter

110° opening

Compatible with all traditional 200 series mounting plates and with all Domi® snap-on mounting plates.