



Series 400 Mini Cabinet Hinges 94°

C4A7x99


Space needed to open the door



T=	16	18	20	22	24	26	28
K=3 A=	0.0	0.0	0.0	0.7	2.7	4.6	7.9
K=4 A=	0.0	0.0	0.0	0.1	1.8	3.8	6.9
K=5 A=	0.0	0.0	0.0	0.1	1.2	3.0	5.9
K=6 A=	0.0	0.0	0.0	0.1	0.9	2.5	4.9
K=7 A=	0.0	0.0	0.0	0.1	0.7	2.0	3.9
K=8 A=	0.0	0.0	0.0	0.1	0.6	1.7	3.2



K=	3	4	5	6	7	8
L=	0.0	0.0	0.0	0.7	1.7	2.6



H: Mount plate heights are calculated using one of the formulae below, based on whether the door is inset, quarter, half or full overlay.

Inset: $H = -4.5 + K + A$


Quarter: $H = 3.5 + K - (D)$

Half: $H = 7.5 + K - (D)$

Full: $H = 12.5 + K - (D)$

K: Drilling distance from door edge from 3mm to 8mm

T: Door Thickness 28mm

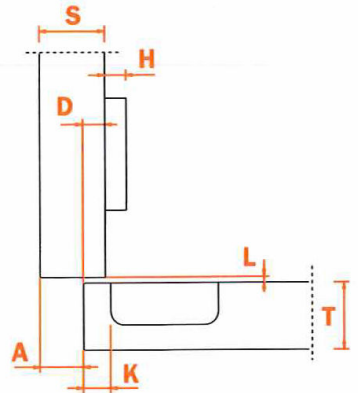

Technical Information

11.5mm deep metal cup, 26mm cup diameter

94° opening

Compatible with all traditional 200 series mounting plates and with all Domi® snap-on mounting plates.